




Ladybug Lazy Kate

Assembly Instructions 

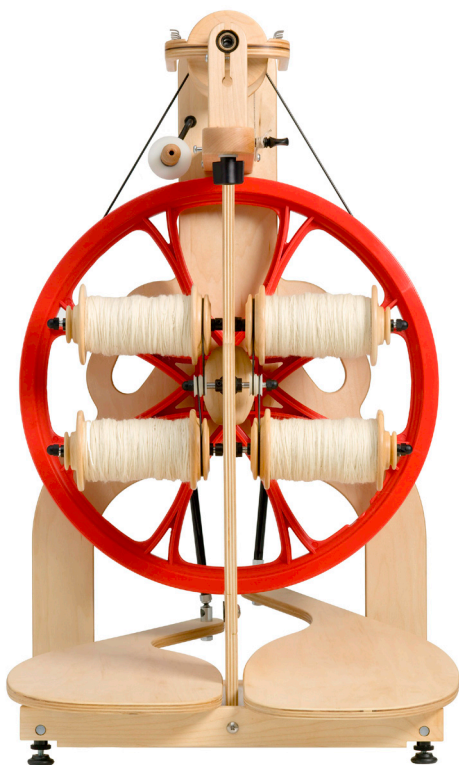

Ladybug Lazy Kate

Our Lazy Kate attaches to the front leg, which makes it easy to carry along with your Ladybug Spinning Wheel.

Parts:


- 2—bobbin rods with push nuts attached
- 1—pulley rod with push nut attached
- 4—O-ring pulleys
- 4—O-rings
- 3—rod collars with set screws
- 1—3/32" Allen wrench
- 6—cap screws

Note: Bobbins are not included.

Assembly


Step 1: Install the bobbin rods

- Slide the bobbin rods into the top and bottom holes in the front leg with the push nuts on the right side.
- Slide the pulley rod into the center hole (between the two bobbin rods) with the push nut on the right side.

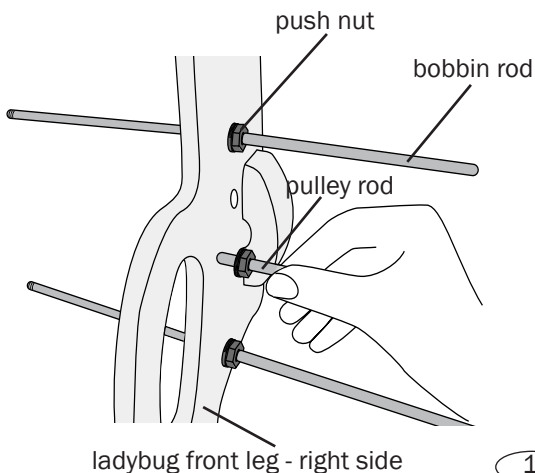



Step 2: Secure the rods

- Loosen the set screws in the rod collars using the Allen wrench.
- Slide the collars onto the left side of each rod all the way to the front leg.
- Use the Allen wrench to tighten the set screw on the side of each collar.
- Hand-tighten the push nuts on the right side of each rod.

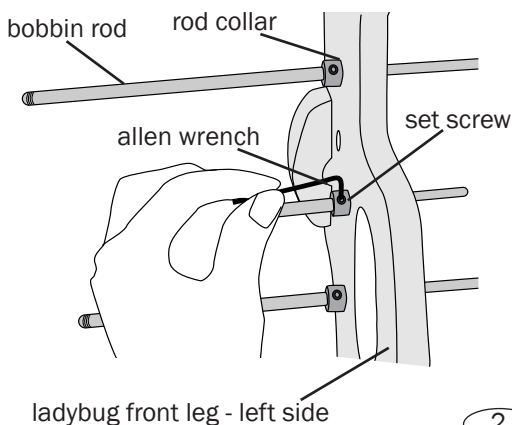

Step 3: Install the O-ring pulleys

- Slide two O-ring pulleys onto each side of the pulley rod.
- Prevent the pulleys from sliding off by screwing a cap nut on each end of the pulley rod.

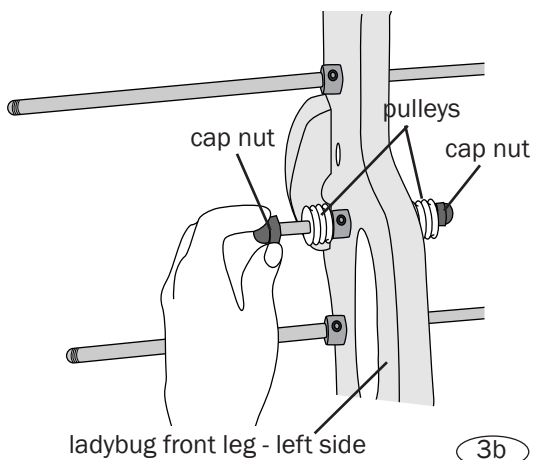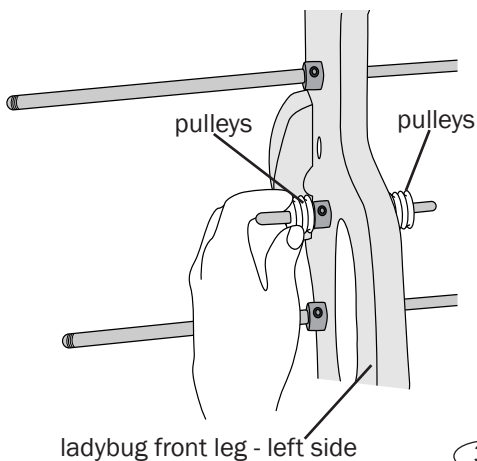


Step 4: Installing the O-rings

The purpose of the O-rings is to tension your bobbins for plying.


- Place the O-ring around the pulley and the large end of the bobbin.
- Use the cap nuts on the ends of the bobbin rods to secure the bobbins on the rod.

Traveling with your Ladybug and Lazy Kate

When on the go with your Ladybug, it is easy to take your bobbins with you on the rods. To prevent the bobbins from sliding off the ends of the rods, be sure to secure them with the cap nuts.

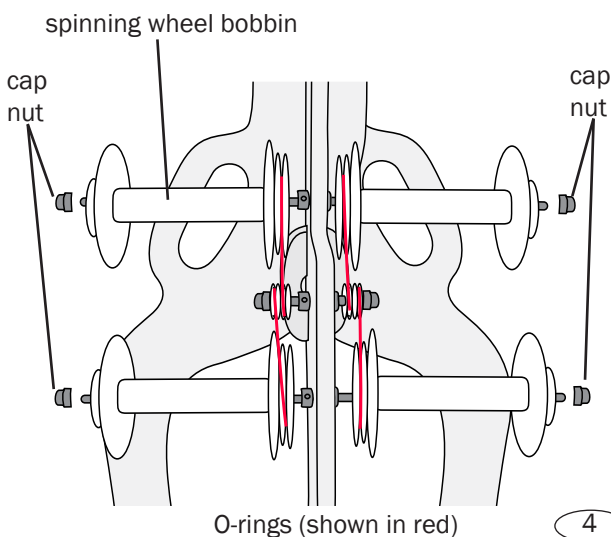

Accessories for Smooth Spinning

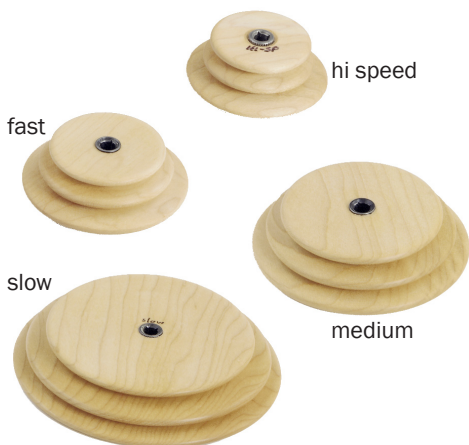

Whorls



Spinning Wheel
Oil Bottle



Dizzy Yarn Gauge

Schacht Spindle Co., Inc.
6101 Ben Place, Boulder, CO 80301
303-442-3212
info@schachtspindle.com
www.schachtspindle.com