


LADYBUG SPINNING WHEEL

REPLACING THE GLIDE STOP

1. Remove the front maiden from the wheel.
2. Apply epoxy glue to the end and sides of the glide stop barrel nut and insert into the hole in the bottom of the front maiden.
3. Allow the specified time for the glue to dry.
4. Replace the front maiden in the wheel, securing it with the front maiden knob and (other) barrel nut.

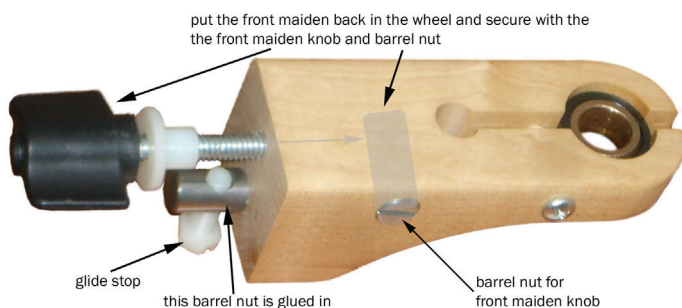

Find out more at schachtspindle.com
Schacht Spindle Company 6101 Ben Place Boulder, CO 80301
p. 303.442.3212 f. 303.447.9273

© 2012 Schacht Spindle Company, Inc.

10.12