

# SPINNING WHEEL CART

## ASSEMBLY INSTRUCTIONS



Find out more at [schachtspindle.com](http://schachtspindle.com)

Schacht Spindle Company 6101 Ben Place Boulder, CO 80301

p. 303.442.3212 f. 303.447.9273

© 2011 Schacht Spindle Company, Inc.

03.11

# SPINNING WHEEL CART

## ASSEMBLY INSTRUCTIONS

### PARTS LIST

- 2 - Plastic Wheels
- 2 - Axle Bolts
- 2 - Hitch Pins
- 1 - Handle Stop
- 1 - 5mm Hex Wrench
- 1 - Blunt Nail

### INSTALLING THE AXLE BOLT

1. Place the spinning wheel on its left side (figure 1).
2. Remove the bronze bolt from the bottom of the right leg (1). Use the enclosed hex wrench.
3. Slip the axle bolt (A) through the hole in the leg and screw it into the barrel nut (N) in the rear leg brace (3).
4. Take the blunted nail and slip it through the cross hole (H) in the axle and use it to tighten up the axle. Remove the nail.
5. Turn the spinning wheel over on its right side and remove the bronze bolt on the bottom of the left leg (2).
6. Take the carrying strap clip off the bronze bolt and put it on the axle bolt and screw it into the barrel nut.

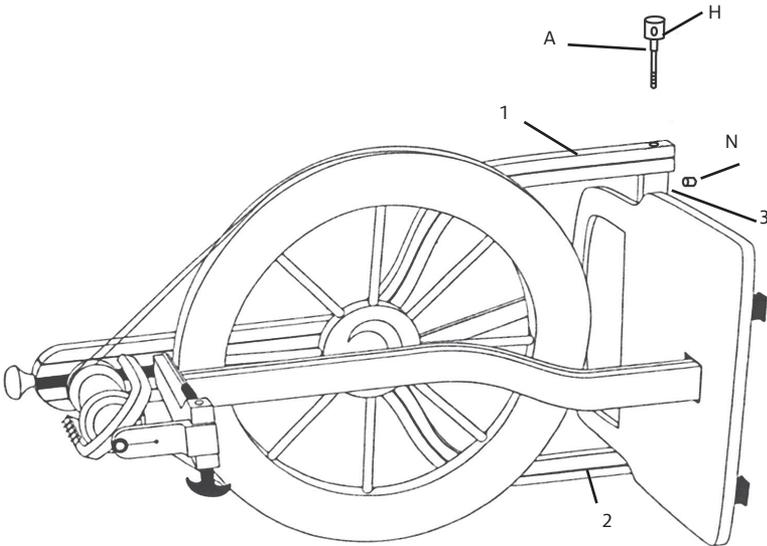


FIGURE 1

## INSTALLING THE WHEELS

1. To install the cart wheels (W), insert the hitch pins (P) through the wheels and into the hole in the end of the axle bolts (figure 2). Turn the pin until the small ball (B) in the end fits into the cross hole (H) in the axle.
2. When you are spinning leave the cart wheels off. When you are going to go somewhere, be sure to also install the handle stop (S) as illustrated in figure 3.

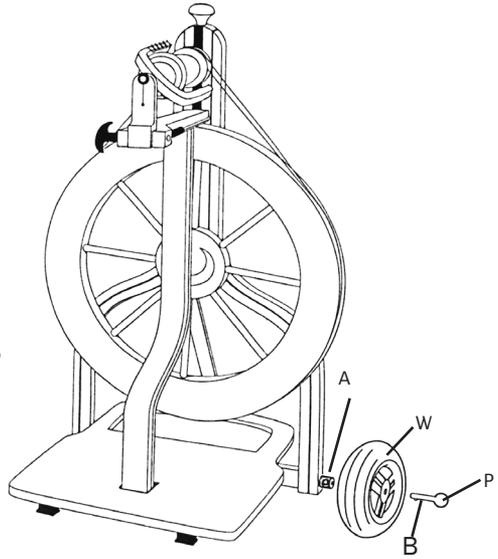


FIGURE 2

## INSTALLING THE HANDLE STOP

1. Remove the extra flyer whorl from the rear bearing holder (R).
2. Turn the drive band tension knob (K) in the counterclockwise direction until you can fit the handle stop (S) in the space between the rear bearing holder (R) and the top of the maiden.
3. After you have fit the handle stop block in, turn the tension knob (K) clockwise until the stop block is snug in place. The stop block can be hung by its string from any convenient place on the spinning wheel. ■

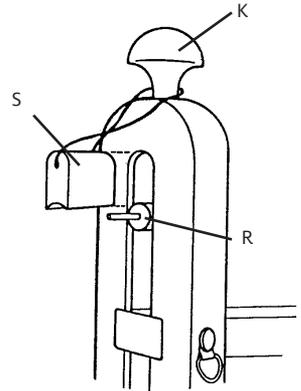


FIGURE 3

# SPINNING ACCESSORIES

## CARDERS

We offer a wide selection of hand carders. They are made of maple. A molded lip on the rear edge of the paddle protects the card clothing from wear. The flared handle is very comfortable and reduces the amount of effort required in carding. Our wool carders are available in 72 and 112 points per square inch. Our 208 p.s.i. cotton carders are excellent for fine fibers, including cotton angora, and cashmere. Our flick carder with 72 p.s.i. is a small, single carder and is used to separate and tease fibers.



## SPINDLES

Our drop spindles are available with 2½", 3" or 4" diameter whorls, and come with a brass hook so they can be used for either top- or bottom-whorl spinning. These spindles are good for spinning medium to long fibers, especially wool.



Our pear tahkli support spindle has a hooked brass shaft and a maple bob. This spindle is excellent for spinning cotton and short, downy fibers.

Our Navajo spindle has a 30" tapered shaft and a 4½" maple whorl.

